

# 952F$_R$
# ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ >>>

| ОБЩИЕ ПАРАМЕТРЫ | |
|---|---|
| Эксплуатационная масса | 65 000 кг |
| Тяговое усилие | 390 кН |
| Скорость передвижения (Макс./Мин.) | 5.0 / 2.8 км/ч |
| Скорость поворота платформы | 7.2 об/мин |


| ДВИГАТЕЛЬ | |
|---|---|
| Экологический класс | CN III |
| Производитель | Cummins |
| Модель | QSM11 |
| Номин. мощность | 333 кВт (453 л.с.) при 1900 об/мин |
| Кол-во цилиндров | 6 |
| Рабочий объем | 10.8 л |

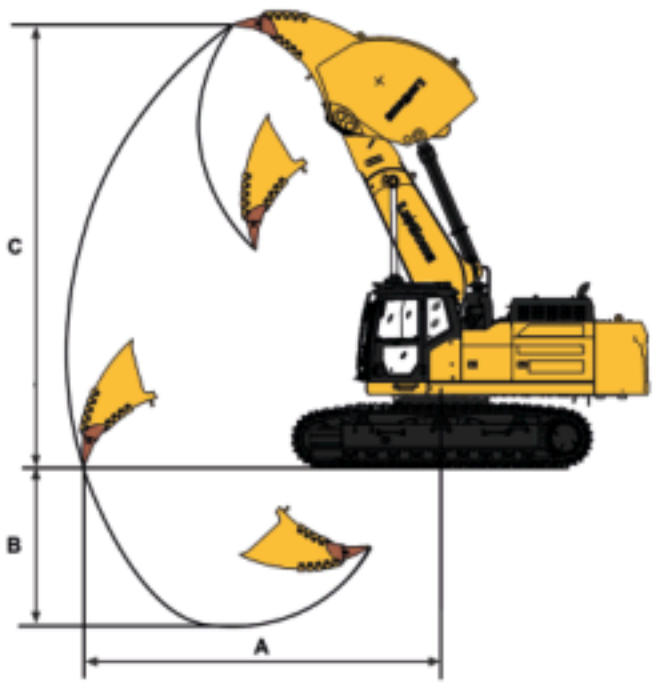



| РАБОЧАЯ ЗОНА | |
|---|---|
| A Макс. радиус рыхления | 6,918 мм |
| B Макс. глубина рыхления | 2,937 мм |
| C Макс. высота рыхления | 8,212 мм |

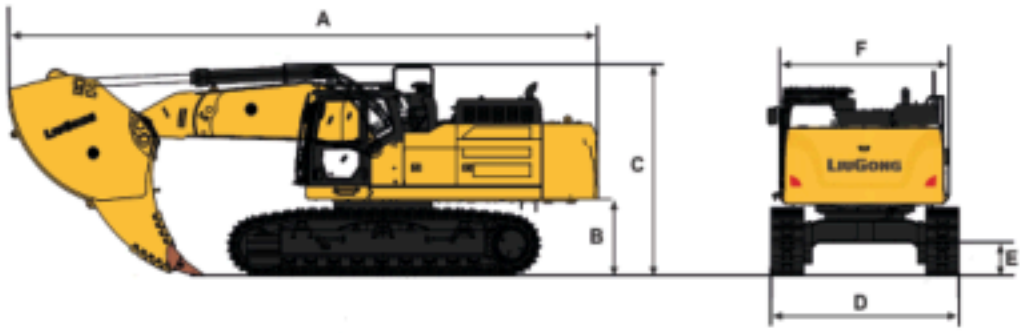


| РАЗМЕРЫ | |
|---|---|
| A Длина при транспортировке | 10,966 мм |
| B Клиренс по противовесу | 1,365 мм |
| C Высота при транспортировке | 3,766 мм |
| D Ширина по гусеницам | 3,490 мм |
| E Мин. дорожный просвет | 598 мм |
| F Ширина поворотной платформы | 3,150 мм |

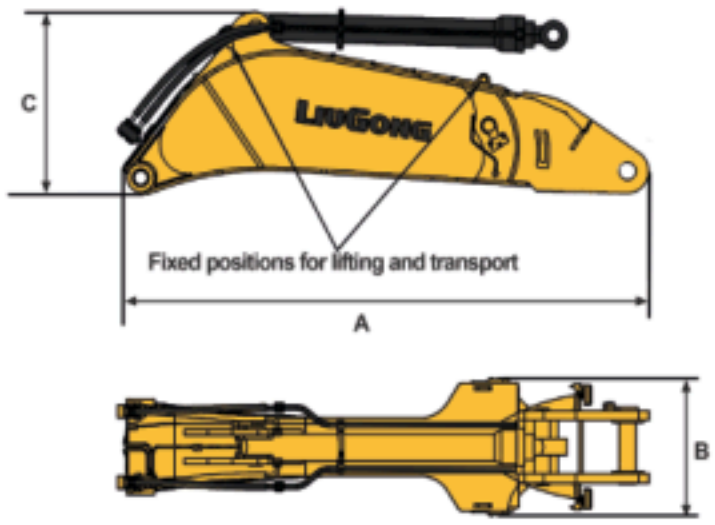


| СТРЕЛА | |
|---|---|
| Масса | 5,500 кг |
| A Длина | 4,750 мм |
| B Ширина | 1,200 мм |
| C Высота | 1,575 мм |

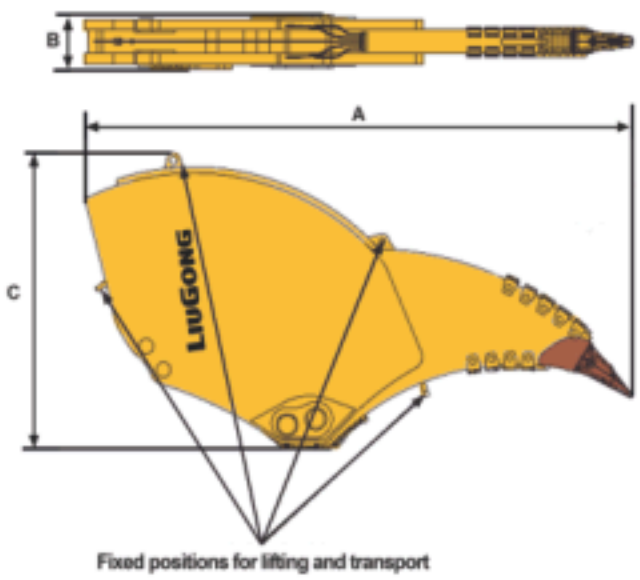


| РУКОЯТЬ С РЫХЛИТЕЛЕМ | |
|---|---|
| Масса | 12,800~15,700 кг |
| A Длина | 4,650 мм |
| B Ширина | 480 мм |
| C Высота | 2,400 мм |

| КОНСТРУКЦИОННЫЙ МАТЕРИАЛ | |
|---|---|
| Материал | Высокопрочная сталь Q355B |

| СПЕЦИФИКАЦИЯ КОМПОНЕНТОВ | |
|---|---|
| Зубья и адаптеры | D11 (Алмазный бренд) |
| Толщина пластин стрелы | 30 мм |
| Толщина пластин рыхлителя | 200 мм |

| ГИДРАВЛИЧЕСКАЯ СИСТЕМА | |
|---|---|
| Цилиндр стрелы (Шток поршня× Поршень) | 115*165 мм |
| Цилиндр рукояти (Шток поршня × Поршень) | 140* 200 мм |

**Guangxi Liugong Machinery Co., Ltd.**
No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China
T: +86 772 3886124 E: overseas@liugong.com
www.liugong.com

02/2026 Designed by LiuGong

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. LiuGong standard and optional equipment may vary from region to region. Please consult your LiuGong dealer for information specific to your area. Engine power kW is converted to horsepower (1 kW=1.3596 ps and 1 kW=1.3410 hp) in this file.

LIUGONG

TOUGH WORLD. TOUGH EQUIPMENT.

**Guangxi LiuGong Machinery Co., Ltd.**
No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China
T: +86 772 388 6124 E: overseas@liugong.com
www.liugong.com

Like and follow us:

LG-952F$_R$-CN III-022026-ENG

The LiuGong series of logos herein, including but not limited to word marks, device marks, letter of alphabet marks and combination marks, as the registered trademarks of Guangxi LiuGong Group Co., Ltd. are used by Guangxi LiuGong Machinery Co., Ltd. with legal permission, and shall not be used without permission. Specifications and designs are subject to change without notice. Illustrations and pictures may include optional equipment and may not include all standard equipment. Equipment and options varies by regional availability.